


# BLACK MEDIUM DUTY STRAIGHT TRACK 200 SERIES

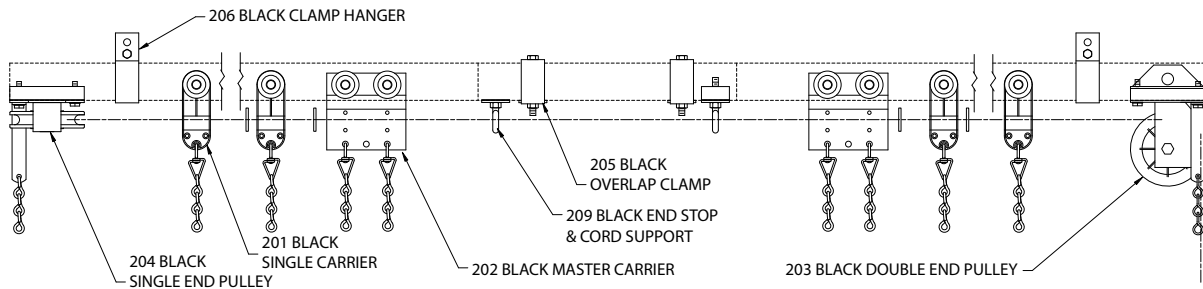


## COMPLETE TRACK MODEL NUMBERS


201B 201S  
221B 221S  
228B 228S

## WALK-ALONG COMPLETE TRACK MODEL NUMBERS


201WB 201WS  
221WB 221WS  
228WB 228WS




**No. 201 BLACK SINGLE CARRIER**  
2 polyethylene wheels riveted to black Super Tough nylon body with shielded ball bearing. Heavy-duty hook, swivel, and trim chain for curtain attachment. Supplied with 1 No. 231 rubber bumper.




**No. 202 BLACK MASTER CARRIER**  
4 polyethylene wheels riveted to steel body with 2 shielded ball bearings. 2 clamps provided for anchoring operating line or cable. Supplied with 1 No. 231 rubber bumper. 1 pair required for overlapping tracks.




**No. 203 BLACK DOUBLE END PULLEY**  
4" diameter MD Nylon sheaves with shielded ball bearings. Steel housing clamps to underside of track. Chain bracket for securing offstage curtain edge.




**No. 203M BLACK DOUBLE END PULLEY**  
Heavy-duty 4" diameter MD Nylon sheaves with sealed precision ball bearings. Steel housing clamps to underside of track. Chain bracket for securing offstage curtain edge. 3/16" groove for use with motorized tracks.




**No. 204 BLACK SINGLE END PULLEY**  
4" diameter MD Nylon sheave with shielded ball bearing. Steel housing clamps to underside of track. Chain bracket for securing offstage curtain edge.




**No. 204M BLACK SINGLE END PULLEY**  
Heavy-duty 4" diameter MD Nylon sheave with sealed precision ball bearings. Steel housing clamps to underside of track. Chain bracket for securing offstage curtain edge. 3/16" groove for use with motorized tracks.




**No. 205 BLACK OVERLAP CLAMP**  
Formed steel clamps to align track at overlap. 1 set pictured.




**No. 206 BLACK CLAMP HANGER**  
Formed steel brackets clamp to track. Adjusts to any position. Suspend track with welded chain or wire rope. 1 pair pictured.




**No. 207 BLACK SPLICE**  
Formed steel brackets align and lock track sections together. 1 pair pictured.



**No. 208 BLACK ADJUSTABLE FLOOR BLOCK**  
4" diameter MD Nylon sheave with shielded ball bearing in steel housing. 9" vertical adjustment.




**No. 208DK BLACK DETACHABLE FLOOR BLOCK KIT**  
7 gauge steel plate with hardware for use with No. 208 Adjustable Floor Block for quick release.

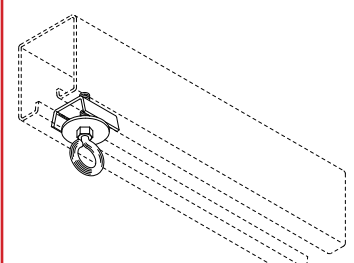

**No. 209 BLACK END STOP & CORD SUPPORT**  
Steel clamp with eye to support operating line and prevent carriers from traveling beyond desired location. 1 pair required for overlapping tracks. **DO NOT USE WITH PIVOT DEVICES.**

# BLACK MEDIUM DUTY STRAIGHT TRACK 200 SERIES

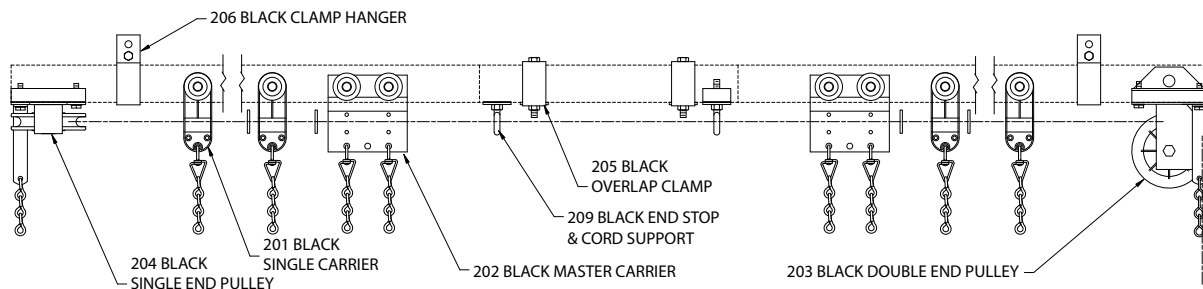


## COMPLETE TRACK MODEL NUMBERS

201B 201S  
221B 221S  
228B 228S


## WALK-ALONG COMPLETE TRACK MODEL NUMBERS

201WB 201WS  
221WB 221WS  
228WB 228WS




### No. 210B BLACK TRACK

16 gauge galvanized steel, roll-formed to 1-3/4" wide x 2" high with semi-gloss black powder coat finish. 16' and 20' stock lengths.



### END STOP


Bolt with horizontal pipe spacer to prevent carriers from traveling beyond desired location. For use with walk-along tracks and tracks with pivot devices.  
**No. 211** - Black finish.



### BLACK REAR FOLD GUIDE


For use with No. 201 carriers. Allows curtain to fold at offstage edges. Supplied with 1 rubber bumper.

**No. 212** - for use with 3/8" operating line.  
**No. 213** - for use with 3/16" operating cable.




### No. 214 BLACK OPERATING LINE

3/8" diameter black polyester braided over Dyneema core for manual operation.

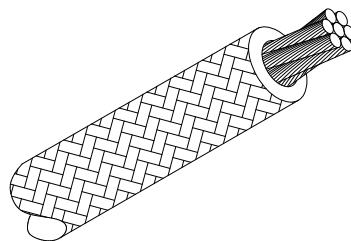

### No. 215 BLACK OPERATING CABLE

3/16" diameter black polyester jacket braided over 3/32" specialty cord wire rope. For use with motorized tracks.




### No. 226 BLACK CENTER PIPE SUPPORT

Formed steel bracket used to support tracks at overlap.


### CEILING SPLICE NOT AVAILABLE

**Note: Ceiling splice cannot be used with 200 Series Carriers and Pivot Devices due to interference with the wheels.**




### No. 228 BLACK SINGLE CARRIER

2 urethane-tired wheels riveted to black Super Tough nylon body with shielded ball bearing. Heavy-duty hook, swivel, and trim chain for curtain attachment. Supplied with 1 rubber bumper.



### No. 229 BLACK MASTER CARRIER

4 urethane-tired wheels riveted to steel body with 2 shielded ball bearings. 2 clamps provided for anchoring operating line or cable. Supplied with 1 rubber bumper. 1 pair required for overlapping tracks.




### ROUND RUBBER BUMPER

1/8" neoprene bumper placed between carriers on operating line to reduce noise.

**No. 230** - for use with 3/16" operating cable.  
**No. 231** - for use with 3/8" operating line.

# BLACK MEDIUM DUTY STRAIGHT TRACK 200 SERIES

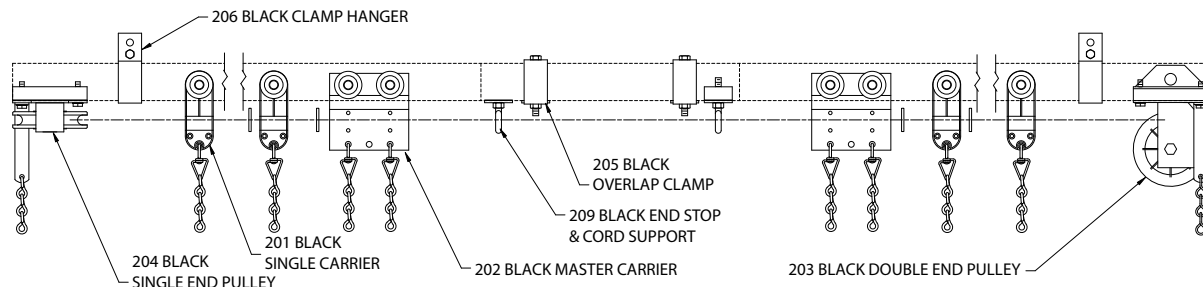


## COMPLETE TRACK MODEL NUMBERS

201B 201S  
221B 221S  
228B 228S


## WALK-ALONG COMPLETE TRACK MODEL NUMBERS

201WB 201WS  
221WB 221WS  
228WB 228WS




### No. 237 BLACK LOCKING MASTER CARRIER

Heavy steel construction with nylon wheels and brake to keep master carrier in desired location. Equipped with swivels and trim chains for curtain attachment. Note: All carriers used with this device must have a trim chain of 6' total length.



### No. 20 BLACK PIVOT DEVICE


Heavy steel construction with nylon wheels. Supplied with brackets for 1-3/8" O.D. pipe or tubing (6' max. recommended length). Allows masking draperies to be rotated to any angle.  
Working Load Limit: 60 pounds.



### No. 20X BLACK INDEXING PIVOT DEVICE

Pivot device with special plate to index rotation at 22-1/2 degree increments. Supplied with brackets for 1-3/8" O.D. pipe or tubing (6' max. recommended length).

Working Load Limit: 60 pounds.



### No. 20BK BLACK BRAKE KIT

Spring equipped arm with neoprene pad. Add to pivot device to prevent undesired movement along track.

## 200 SERIES COMPLETE BLACK TRACK COMPONENT GUIDE

PART No.	DESCRIPTION	201B	221B	228B	201S**
201	Black Single Carrier	•			•
202	Black Master Carrier	•	•		•
203	Black Double End Pulley	•	•	•	
204	Black Single End Pulley	•	•	•	
205	Black Overlap Clamp	•	•	•	
206	Black Clamp Hanger	•	•	•	
207*	Black Splice	•	•	•	
208	Black Adjustable Floor Block	•	•	•	•
209	Black End Stop & Cord Support	•	•	•	
210B*	Black Track	•	•	•	
214	3/8" Operating Line	•	•	•	•
221	Black Single Carrier		•		
228	Black Urethane Single Carrier			•	
229	Black Urethane Master Carrier			•	
210B*	Track				•
203	Double End Pulley				•
204	Single End Pulley				•
205	Overlap Clamp				•
206	Clamp Hanger				•
207	Splice*				•
209	End Stop & Cord Support				•

\* Track lengths and splices supplied as required from stock sizes. Ceiling splices not available due to interference with carrier wheels.

\*\* Components in Models 201S, 221S and 228S are a mixture of black, zinc plated, and galvanized finish.

# BLACK MEDIUM DUTY STRAIGHT TRACK 200 SERIES

## 200 SERIES COMPLETE BLACK WALK-ALONG TRACK COMPONENT GUIDE

PART No.	DESCRIPTION	201WB	221WB	228WB	201WS**	221WS**	228WS**
201	Black Single Carrier	•			•		
202	Black Master Carrier	•	•		•	•	
206	Black Clamp Hanger	•	•	•			
207*	Black Splice	•	•	•			
209	Black End Stop & Cord Support	•	•	•			
210B*	Black Track	•	•	•			
221	Black Single Carrier		•			•	
228	Black Urethane Single Carrier			•			•
229	Black Urethane Master Carrier			•			•
210B*	Track				•	•	•
206	Clamp Hanger				•	•	•
207	Splice*				•	•	•
209	End Stop & Cord Support				•	•	•

\* Track lengths and splices supplied as required from stock sizes. Ceiling splices not available due to interference with carrier wheels.

\*\* Components in Models 201WS, 221WS and 228WS are a mixture of black, zinc plated, and galvanized finish.

## GENERAL SPECIFICATIONS

Provide **Model 201WB** as manufactured by H & H Specialties Inc., South El Monte, CA.

Track shall be 16 gauge galvanized steel, roll-formed to 1-3/4" wide X 2" high with continuous slot in bottom. Provide unspliced in lengths up to 24'.

Suspend track with two-piece clamp hanger formed from 11 gauge steel. Install end stop with cord support at each track end. Where lengths exceed 24', connect tracks with 12" long, two-piece splicing clamp of 12 gauge steel.

Provide single carriers, spaced on 12" centers, constructed of two polyethylene wheels fastened parallel to shielded ball bearing carrier body and supplied with heavy-duty hook, swivel eye and trim chain for attachment of curtain. Black Super Tough nylon shall be molded around shielded and greased ball bearing to form carrier body.

Master carriers shall be 4-wheel assemblies with bodies formed from 11 gauge steel with press-fit shielded ball bearings. Supply each master carrier with two heavy-duty hooks, swivel eyes and trim chains for attachment of leading edge of curtain.

Track shall be finished with a semi-gloss black powder coat. All other steel components shall be black oxide finished.



# BLACK MEDIUM STRAIGHT TRACK 200 SERIES

---

## GENERAL SPECIFICATIONS: (Continued)

Provide **Model 201B** as manufactured by H & H Specialties Inc., South El Monte, CA.

Track shall be 16 gauge galvanized steel, roll-formed to 1-3/4" wide X 2" high with continuous slot in bottom. Provide unspliced in lengths up to 24'.

Suspend track with two-piece clamp hanger formed from 11 gauge steel. Provide 2' overlap at center, rigidly separated by two overlap clamps. Install end stop with cord support at each track end. Where lengths exceed 24', connect tracks with 12" long, two-piece splicing clamp of 12 gauge steel.

Provide single carriers, spaced on 12" centers, constructed of two polyethylene wheels fastened parallel to shielded ball bearing carrier body and supplied with heavy-duty hook, swivel eye and trim chain for attachment of curtain. Black Super Tough nylon shall be molded around shielded and greased ball bearing to form carrier body. Install round neoprene bumper between each carrier on operating line to reduce noise.

Master carriers shall be 4-wheel assemblies with bodies formed from 11 gauge steel with press-fit shielded ball bearings. Connect to operating line with two formed steel cord clamps attached to each body. Supply each master carrier with two heavy-duty hooks, swivel eyes and trim chains for attachment of leading edge of curtain.

Single and double end pulleys shall clamp securely to the underside of the track channel and shall contain 4" diameter sheaves enclosed in steel housings to prevent operating line from escaping the grooves. Sheaves shall be MD Nylon molded around shielded and greased ball bearings and grooved to accommodate up to 3/8" operating line.

Provide floor block in 12 gauge steel housing containing 4" MD Nylon shielded ball bearing sheave. Sheave axle shall lock at any point within 9" vertical slots to allow tension adjustment of operating line.

Black operating line shall be 3/8" diameter, stretch-resistant rope with spun polyester outer jacket braided over Dyneema core.

Track shall be finished with a semi-gloss black powder coat. All other steel components shall be black oxide finished.

---

Provide **Model 228B** as manufactured by H & H Specialties Inc., South El Monte, CA.

Track shall be 16 gauge galvanized steel, roll-formed to 1-3/4" wide X 2" high with continuous slot in bottom. Provide unspliced in lengths up to 24'.

Suspend track with two-piece clamp hanger formed from 11 gauge steel. Provide 2' overlap at center, rigidly separated by two overlap clamps. Install end stop with cord support at each track end. Where lengths exceed 24', connect tracks with 12" long, two-piece splicing clamp of 12 gauge steel.

Provide single carriers, spaced on 12" centers, constructed of two urethane-tired wheels fastened parallel to shielded ball bearing carrier body and supplied with heavy-duty hook, swivel eye and trim chain for attachment of curtain. Black Super Tough nylon shall be molded around shielded and greased ball bearing to form carrier body. Install round neoprene bumper between each carrier on operating line to reduce noise.

Master carriers shall be 4-wheel assemblies with bodies formed from 11 gauge steel with press-fit shielded ball bearings. Connect to operating line with two formed steel cord clamps attached to each body. Supply each master carrier with two heavy-duty hooks, swivel eyes and trim chains for attachment of leading edge of curtain.

Single and double end pulleys shall clamp securely to the underside of the track channel and shall contain 4" diameter sheaves enclosed in steel housings to prevent operating line from escaping the grooves. Sheaves shall be MD Nylon molded around shielded and greased ball bearings and grooved to accommodate up to 3/8" operating line.


Provide floor block in 12 gauge steel housing containing 4" MD Nylon shielded ball bearing sheave. Sheave axle shall lock at any point within 9" vertical slots to allow tension adjustment of operating line.

Black operating line shall be 3/8" diameter, stretch-resistant rope with spun polyester outer jacket braided over Dyneema core.


Track shall be finished with a semi-gloss black powder coat. All other steel components shall be black oxide finished.

---


# BLACK TRACK 201B SERIES

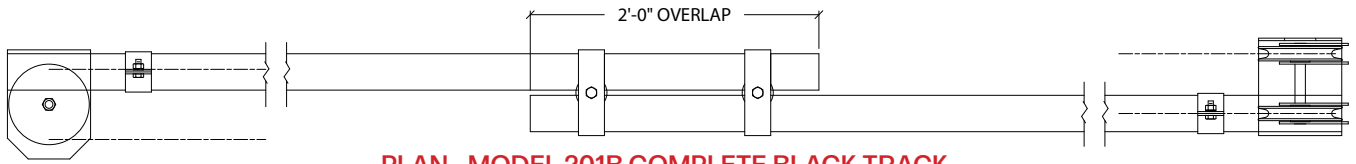


**PLAN - MODEL 201B COMPLETE BLACK TRACK**

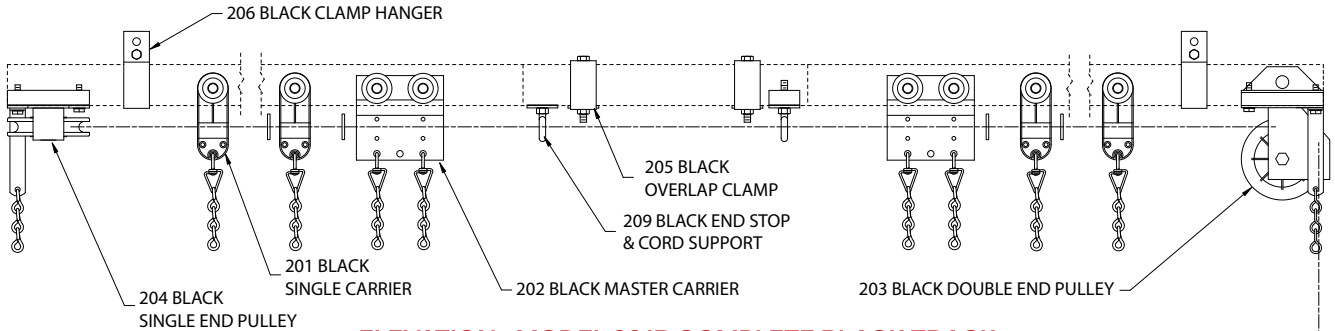

**ELEVATION - MODEL 201B COMPLETE BLACK TRACK**

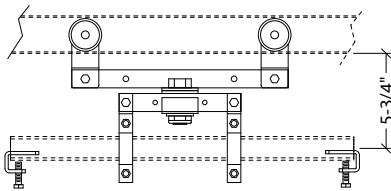


**20 BLACK PIVOT DEVICE**


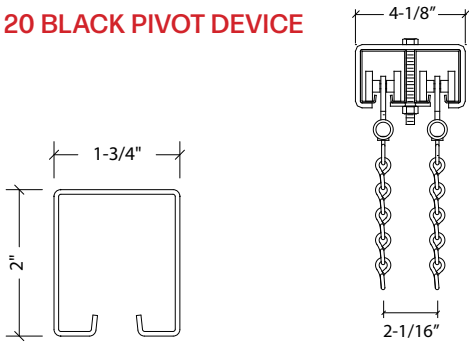


**201B BLACK TRACK**


**TRACKS AT CENTER OVERLAP**

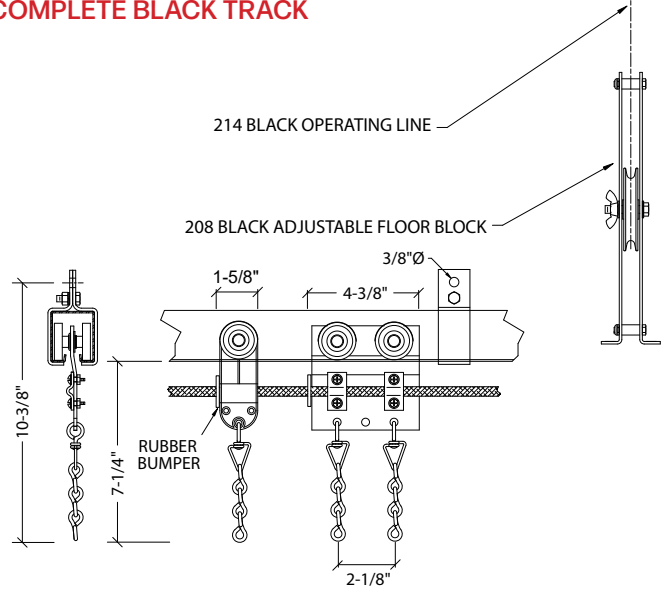



**201 BLACK SINGLE CARRIER AND  
202 BLACK MASTER CARRIER**

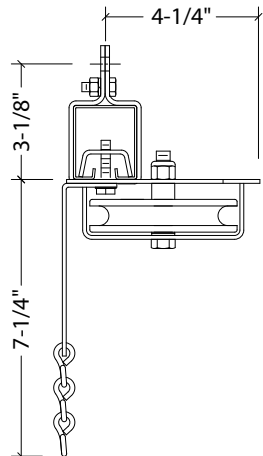

**204 BLACK SINGLE  
END PULLEY**

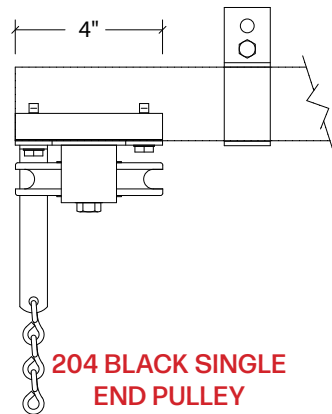


**203 BLACK DOUBLE  
END PULLEY**

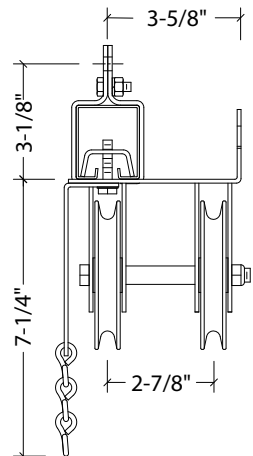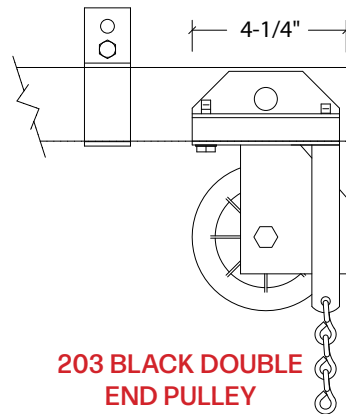


**214 BLACK OPERATING LINE**

**208 BLACK ADJUSTABLE FLOOR BLOCK**

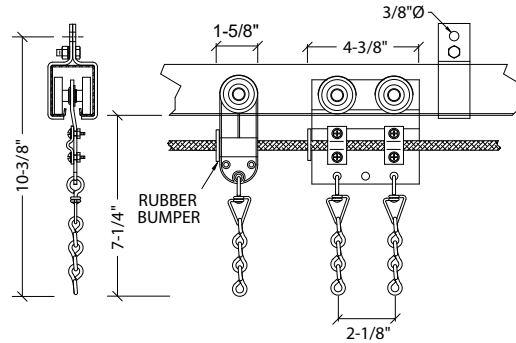


**RUBBER  
BUMPER**


# BLACK TRACK 228B SERIES

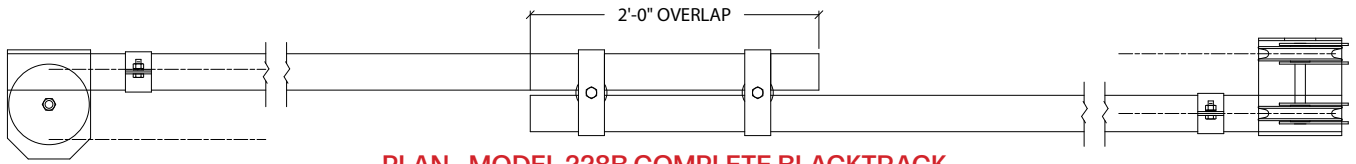

**PLAN - MODEL 228B COMPLETE BLACKTRACK**

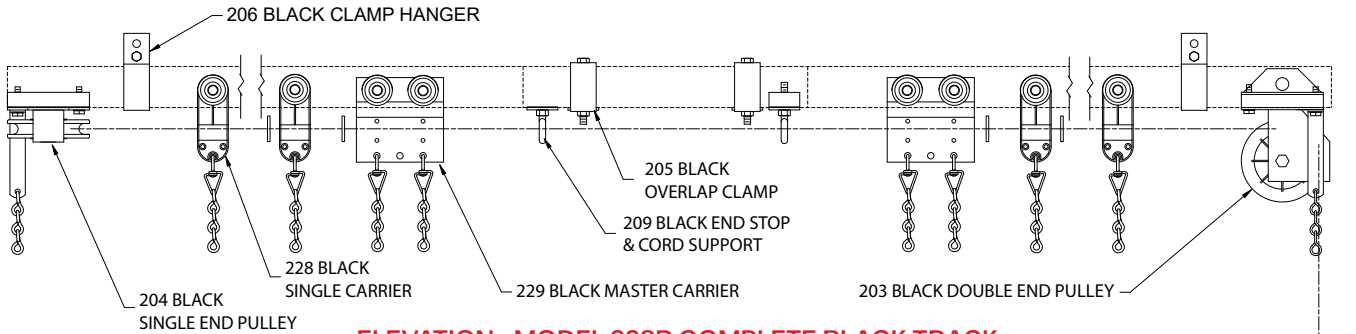


**ELEVATION - MODEL 228B COMPLETE BLACK TRACK**

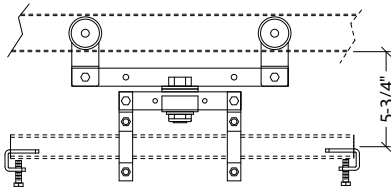


**20 BLACK PIVOT DEVICE**

214 BLACK OPERATING LINE


208 BLACK ADJUSTABLE FLOOR BLOCK




**201B BLACK TRACK**




**TRACKS AT CENTER OVERLAP**

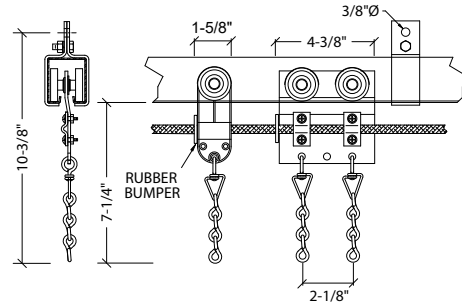

**228 BLACK SINGLE CARRIER AND 229 BLACK MASTER CARRIER**

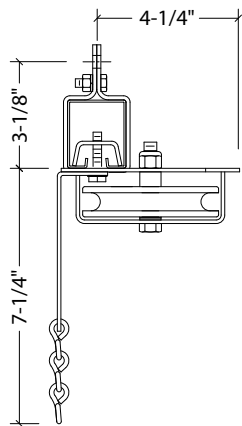

**204 BLACK SINGLE END PULLEY**

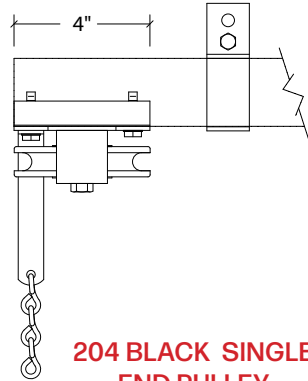

**203 BLACK DOUBLE END PULLEY**

